


WHEEL LOADER FORK RACK

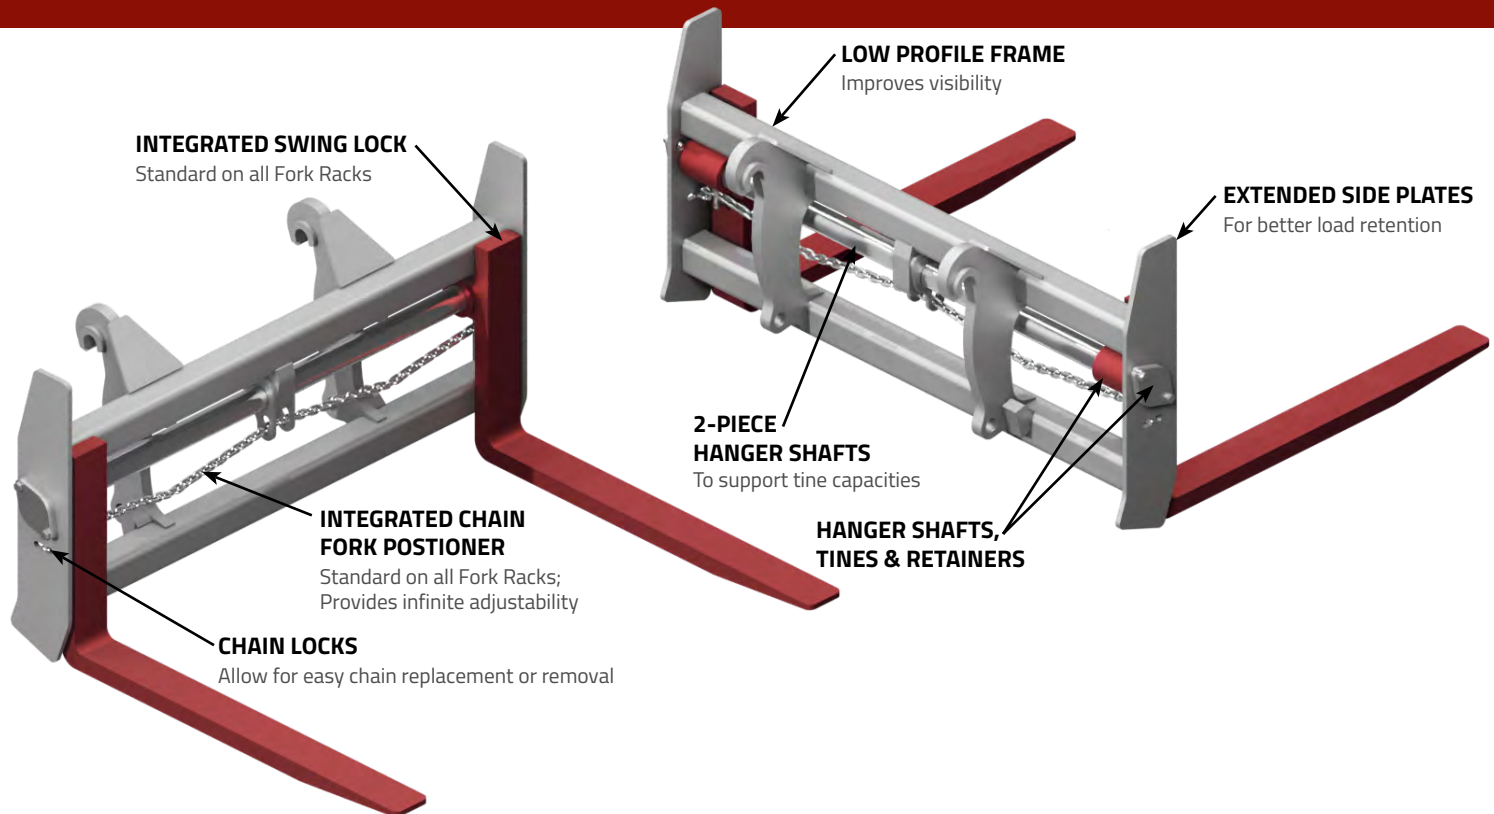

FEATURES

- High strength alloy hanger shafts support increased fork tine capacities to handle heavier loads
- Simple to use or remove, chain link style fork positioning is standard on all WBM fork racks and allows for infinite adjustment
- Integrated swing locks developed between the tine and frame are offered as a standard upgrade
- Extended side plates, both in height and width, will provide improved load retention
- The open frame design allows for optional hydraulic fork positioning kits to be added
- Utilizes common components (hanger shafts, tines, shaft retainers) between similar product lines which helps decrease parts inventory where applicable

WBM has re-developed our Wheel Loader line of Fork Racks to improve operator visibility and offer increased functionality throughout the product line up. Available in widths from 72" to 120", depending on machine and application. The rugged, low profile frame offers improved visibility to tines at both ground and deck levels.

HYDRAULIC FORK POSITIONING OPTION

Includes two hydraulic cylinders, four pins, and hydraulic lines to bulkhead fittings. Does not include jumper lines to the machine.

Continued on next page »



WELDCO-BEALES MFG.
SPECIALISTS IN ATTACHMENT DESIGN AND MANUFACTURING
www.weldco-beales.com

Western Canada: 1 800 665 0511
Central Canada: 1 800 661 4155
Eastern Canada: 1 877 320 4286

Last revised: October 6, 2025

STANDARD FORK RACK CAPACITY BY SIZE

						WBM PF 125-150			
CASCADE FORK TINE CAPACITY CHART						WBM PF125-150 FRAME WIDTHS			
Fork Dimensions		Capacity (in lbs) per pair of forks at load center				72 inch		84 inch	
Fork Thickness (in)	Fork Width (in)	24 inch load center	30 inch load center	36 inch load center	48 inch load center	PALLET	SHIPPING CONTAINER	PALLET	SHIPPING CONTAINER
2	6	12 600	12 600	8 400	6 200	✓		✓	✓
	8	16 800	13 500	11 200	8 400	✓		✓	
2.5	6	21 400	17 139	14 200	10 600	✓		✓	
	8	28 400	22 800	19 000	14 200				

						WBM PF 175-200					
CASCADE FORK TINE CAPACITY CHART						WBM PF175-200 FRAME WIDTHS					
Fork Dimensions		Capacity (in lbs) per pair of forks at load center				72 inch		84 inch		96 Inch	
Fork Thickness (in)	Fork Width (in)	24 inch load center	30 inch load center	36 inch load center	48 inch load center	PALLET	SHIPPING CONTAINER	PALLET	SHIPPING CONTAINER	PALLET	SHIPPING CONTAINER
2	6	12 600	12 600	8 400	6 200						
	8	16 800	13 500	11 200	8 400	✓		✓		✓	✓
2.5	6	21 400	17 139	14 200	10 600	✓		✓	✓	✓	✓
	8	28 400	22 800	19 000	14 200	✓		✓		✓	✓

						WBM PF 250-300					
CASCADE FORK TINE CAPACITY CHART						WBM PF250-300 FRAME WIDTHS					
Fork Dimensions		Capacity (in lbs) per pair of forks at load center				84 inch		96 Inch		120 Inch	
Fork Thickness (in)	Fork Width (in)	24 inch load center	30 inch load center	36 inch load center	48 inch load center	PALLET	SHIPPING CONTAINER	PALLET	SHIPPING CONTAINER	PALLET	SHIPPING CONTAINER
2.75	8	33 000	26 400	22 000	16 400	✓		✓	✓		✓
3.0	8	38 000	29 900	25 200	19 000	✓		✓	✓		✓
	10	38 000	37 900	31 600	23 600	✓			✓		✓
3.5	8	38 000	38 000	36 400	27 200	✓			✓		✓

The standard fork rack is rated for a maximum lifting capacity of **38 000 lbs**. Individual fork tines may have higher load ratings, but do not lift loads that exceed the rated capacity of the fork rack.